

Function

Spectacular effects of water droplets falling from great heights in slow motion, quietly and without splash. Laces may be installed up to 20° from vertical without compromising the effectiveness of the rain curtain. Curtain can take many forms. Dazzling when illuminated.

Specifications

NRC100, NRC101 curtain laces shall be clear Mylar, 0.250" (6 mm) x length to suit . NRC100 spool length is 100' (30 m) NRC101 spool length is 600' (200m). Specify when ordering.

NRC200 DEFO nozzle assembly shall be hexagonal brass, 0.50" (12 mm) x 2" (50 mm) with brass lock ring, washer, locknut and neoprene gasket.



NRC300 Splash suppressor shall be clear plastic, 0.33" (7 mm) x 2" (50 mm).

NRC-400 DEFO curtain weights shall be lead, 3/4 lbs (450 gm).

Notes

for optimum effect

1. Each nozzle requires 6 gph (0.1 lpm) at a 0.75" (20 mm) water depth at nozzle.
2. Nozzle spacing should be 1.125" (32 mm) minimum.
3. Utilize only filtered and softened water to prevent clogging and discolouring of lace.
4. Contact the factory for design and installation recommendations.

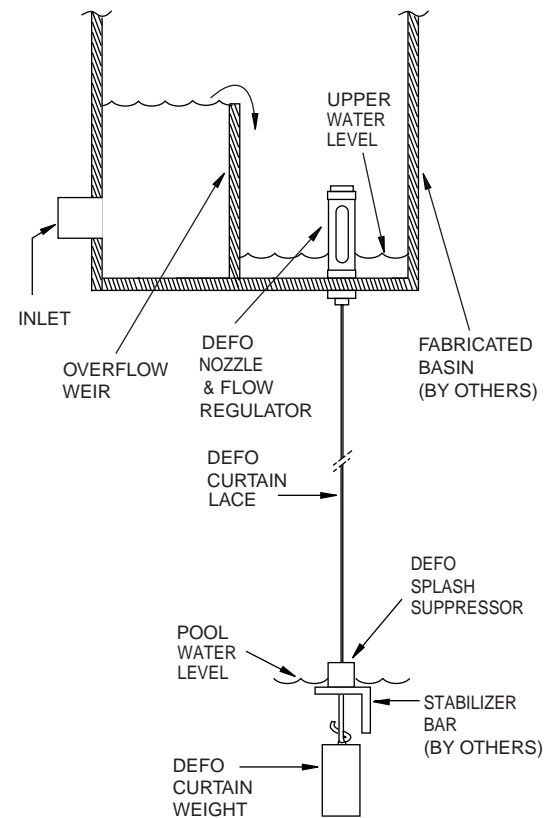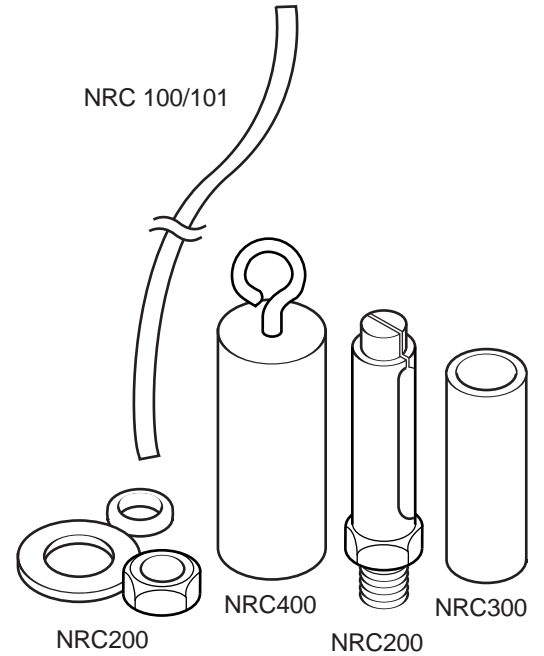

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CRYSTAL FOUNTAINS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CRYSTAL FOUNTAINS IS PROHIBITED.

SHOP DRAWING
NRC-D101

www.crystalfountains.com

Crystal Fountains

RAIN CURTAIN

SERIES
NRC

REV.
-

TEL. (905) 660-6674

FAX. (905) 660-6916

1.1.2000